


# ATP W44-2

## End profile

### Rigid PVC profile with cranked edge and welded fabric strip

- With plaster edge for targeted water flow

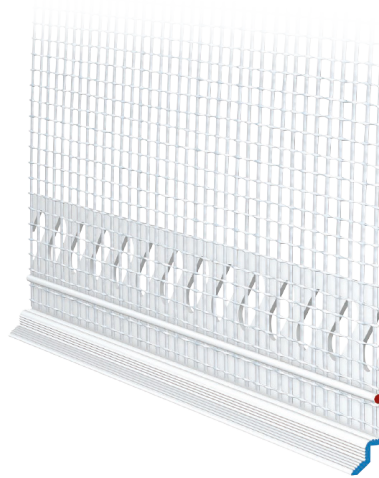


## Applications

- for forming a clean lower plaster finish in ETIC systems
- as horizontal plaster separation

## Properties

- fabric overhang of 10 cm on one side in the longitudinal direction
- Punched plaster web with cranked drip edge
- alkali-resistant glass fibre fabric 160 g/m<sup>2</sup>

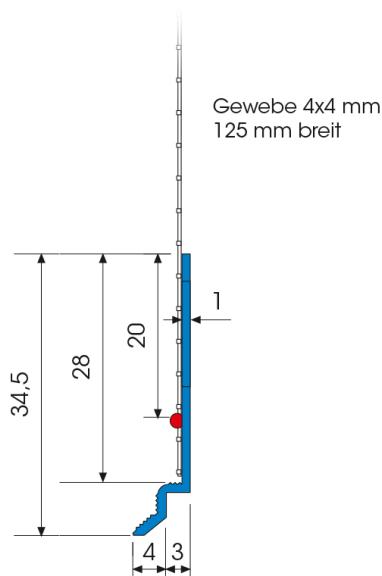

## Substrate

### Condition / Testing

- The substrate must be dry, load-bearing, clean, dust-free and free of adhesion-reducing residues, release agents, efflorescence and sintered coatings.

## Processing

### Temperature

- Do not use in case of air, material and substrate temperatures of less than +5°C or over +30°C.

### Applying / Processing / Assembling

- Cut the profile to the required length using suitable support shears.
- Embed the end profile flush with the reinforcement over the entire surface and align.
- Embed the surface fabric in the reinforcement, pull it up to the plaster edge and cut it off.
- Apply finish coat after a sufficient rest time.

## Storage

- Store dry, flat and frost-free.
- Deformation of the product due to improper storage must be avoided.

## Packaging

- 25 pieces/bundle

# ATP W44-2

End profile

## Technical Data

**Length** 2.00 m

---

All data are average values that were determined under laboratory conditions according to relevant test standards and application tests. Deviations are possible under practical conditions.

## General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.