




# VESTEROL® TG 10D

Deep primer for priming and surface strengthening

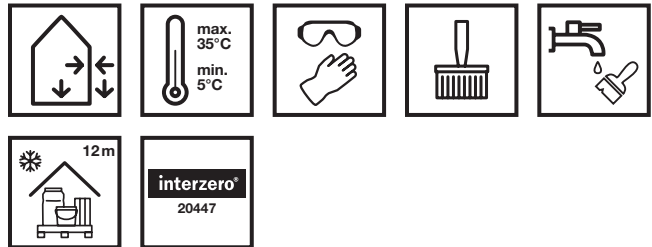

These pictograms apply to the **basic product**.  
Deviations are possible depending on the area of application  
and processing.

## PRODUCT INFORMATION

### Description

VESTEROL® TG 10D is a solvent-free, low-odour primer with good penetration properties. The product has a dust-binding effect and improves the load-bearing capacity of absorbent substrates.

### Application

- as a primer before painting with plastic dispersion paints and before mineral or plastic-bound plaster systems
- as a primer for roof coatings on bitumen roofs and fiber cement boards
- as a surface strengthener for mineral, absorbent and slightly sandy substrates, including calcium sulfate screeds

### Operational area

- Façades
- Sanding and dusty screeds
- Bitumen roofs and fiber cement boards
- Wood, plasterboard, hardboard and chipboard

### Place of use

- for outdoor and indoor areas

### Properties

- solvent-free
- low odor
- solvent-free
- low odour
- deep-setting
- universal use



## Technical Data

Available container sizes	5 l/PE canister 20 l/PE can
Colour	white, transparent drying
Density	ca. 1,01 kg/l
Processing temperature	+5°C up to +35°C
Drying time	approx. 2 hours <sup>1)</sup>
Storage	frost-free, 12 months
Consumption	approx. 0.15 l/m <sup>2</sup> per coat

<sup>1)</sup> At +20 °C and 60 % relative humidity

## SUBSTRATE

### Properties/tests

- The substrate must be free of impurities and loose particles.

## AREAS OF APPLICATION AND PROCESSING

### Applying

- Apply with a brush, paintbrush or sprayer.
- Subsequent coats are applied after the primer has completely dried.

### Drying / Follow-up work

- The drying time is approx. 2 hours (at +20 °C and 60 % relative humidity).

## NOTES

### Cleaning

- Clean tools immediately after use with water.

### System products

- DAKORIT® Roof protection systems
- VESTEROL® Plaster systems
- HADALAN® Floor protection systems

### To be observed

- Protect adjacent components from splashes and spray mist.

### Ingredients

- Synthetic resin dispersion
- Wetting agent

### Occupational safety / Recommendation

- The usual hygiene and precautionary measures when handling chemical products must be observed. Wear suitable protective clothing. Follow further instructions in the safety data sheet. Further information on safety during transportation, storage and handling can be found in the current safety data sheets.

### Disposal

- The following applies to all systems: Only return empty containers to recycling partner Interseroh. Material residues can be disposed of according to EWC code no. 08 04 16 (aqueous liquid wastes containing adhesives and sealants, except those covered by 08 04 15).



**HADALAN®** Floor protection / Balcony protection



## ■ Producer

### **Sievert Baustoffe SE & Co. KG**

Mühlenschweg 6, 49090 Osnabrück

Tel. +49 2363 5663-0, Fax +49 2363 5663-90

[hahne-bautenschutz.de](mailto:hahne-bautenschutz.de), [info-hahne@sievert.de](mailto:info-hahne@sievert.de)

The statements are made based on extensive tests and practical experiences. They cannot be applied to every application case. Therefore, we recommend carrying out application trials if necessary. Subject to technical changes in the course of further development. Furthermore, our General Terms and Conditions of Business apply.