


akurit WF Multi-Tape-F ST

high performance adhesive tape on 20/40 mm slit film carrier

- resistant to ageing
- solvent-free
- weather and UV-resistant

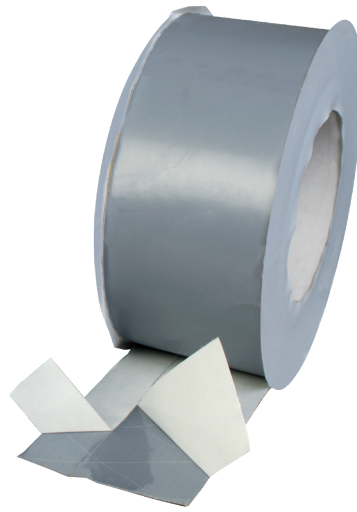

Applications

- for use in the AKURIT System Natura WF M
- for bonding joints and connections on AKURIT fibreboards
- for interior and protected exterior use

Properties

- highly moisture resistant
- rainproof

Substrate

Suitable substrates

- AKURIT wood fibre insulation panels

Condition / Testing

- The substrate must be dry and free of ice.

Pretreatment

- Pre-treat AKURIT fibreboards with AKURIT GTA acrylate deep primer.
- The adhesive area on the fibreboard must be at least 50 mm.

Processing

Temperature

- Do not use in case of air and substrate temperatures of less than -10°C.

Applying / Processing / Assembling

- Apply AKURIT WF Multi-Tape-F ST in a width of 100 or 150 mm, remove paper liner and rub on.
- To improve adhesion, additional pressing on with a paint roller or other roller is recommended.

Packaging

- 25 m/roll

Storage

- Store in the original, unopened packaging in dry, frost-free conditions.
- Protect against direct sunlight.

Colour	grey
Thickness of material	0.3 mm
Temperature resistance, permanent	-40°C to +100°C
Peel resistance	fulfilled according to DIN 4108-11
Peel resistance after ageing	fulfilled according to DIN 4108-11

akurit WF Multi-Tape-F ST

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.