


akurit GBP

Groove profile

trapezoidal groove joint made of plastic with fused meshes

- neat finish
- easy to apply
- width: approx. 30 mm
- depth: approx. 20 mm

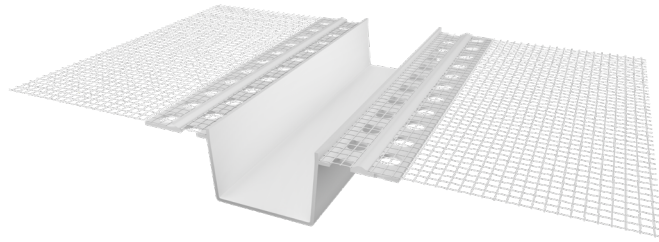

Applications

- for precise edge forming
- for driving rain-proof grooves

Processing

Applying / Processing / Assembling

- Draw groove on insulating material and mill out/cut with suitable tool.
- Apply akurit adhesive and levelling mortar over the entire surface of the recess. A cavity-free embedding of the profile in the adhesive must be ensured to prevent the formation of cracks at joints and / or the profile edges.
- Place the profiles with 2 mm spacing in the joint area and close the resulting joint with a permanently elastic sealant.
- Insert the akurit GBP ashlar profile into the mortar bed and embed the reinforcement fabric.
- Fill surface mesh up to plaster edge overlapping.
- Finally, remove the protective foil from the groove.

Subsequent coating / workability

- Paint over with suitable facade paint if required.

Storage

- Store dry and as per instructions.
- Deformation of the product due to improper storage must be avoided.

Packaging

- 20 kg/bag

Technical Data

Length	2.5 m
---------------	-------

All data are average values that were determined under laboratory conditions according to relevant test standards and application tests. Deviations are possible under practical conditions.

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.