




# HADALAN® C 10D

Post-treatment agent for fresh concrete

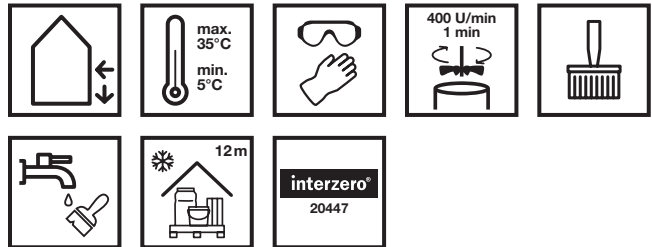

These pictograms apply to the **basic product**.  
Deviations are possible depending on the area of application and processing.

## PRODUCT INFORMATION

### Description

HADALAN® C 10D is a transparent drying fresh concrete protective agent based on plastic dispersion. It prevents premature evaporation of the mixing water, reduces the tendency to shrinkage cracking and increases the compressive and flexural tensile strength of the cement due to sufficiently prolonged hydration. Does not impair the adhesion of subsequent coats and is non-odorous.

### Application

- for curing and improving the hydration process of fresh concrete
- als protection against draughts, strong sunlight and low humidity

### Operational area

- fresh concrete

### Place of use

- in outdoor areas

### Properties

- solvent-free
- prevents drying out
- transparent
- improves the hydration process
- reduces the tendency to shrinkage cracking

### Technical Data

Available container sizes	20 kg/PE canister
Density	ca. 1,92 kg/l
Processing temperature	+5°C up to +35°C
Storage	frost-free, 12 months
Consumption	approx. 0.15 – 0.2 kg/m <sup>2</sup> per application



### ■ Applying

- Stir product well before use.
- Brush or spray undiluted onto the fresh concrete directly after concreting.

## NOTES

### ■ Cleaning

- Clean all tools and equipment with water immediately after use.

### ■ To be observed

- Maintain a processing temperature of +5 °C to +35 °C.
- At very high ambient temperatures, the specified application quantities must be increased.
- Concrete or screed must not have set before application.
- Slight yellowing is to be expected on exposed surfaces.

### ■ Ingredients

- Synthetic resin dispersion

### ■ Occupational safety / Recommendation

- Further information on safety during transportation, storage and handling can be found in the current safety data sheets.

### ■ Disposal

- The following applies to all systems: Only return empty containers to recycling partner Interseroh. Material residues can be disposed of according to EWC code no. 08 04 16 (aqueous liquid wastes containing adhesives and sealants, except those covered by 08 04 15).

### ■ Producer

**Sievert Baustoffe SE & Co. KG**  
Mühlenschweg 6, 49090 Osnabrück  
Tel. +49 2363 5663-0, Fax +49 2363 5663-90  
[hahne-bautenschutz.de](mailto:hahne-bautenschutz.de), [info-hahne@sievert.de](mailto:info-hahne@sievert.de)

The statements are made based on extensive tests and practical experiences. They cannot be applied to every application case. Therefore, we recommend carrying out application trials if necessary. Subject to technical changes in the course of further development. Furthermore, our General Terms and Conditions of Business apply.