


PAP

Plaster end profile

Rigid PVC profile with welded-on glass fibre fabric

- colour: white

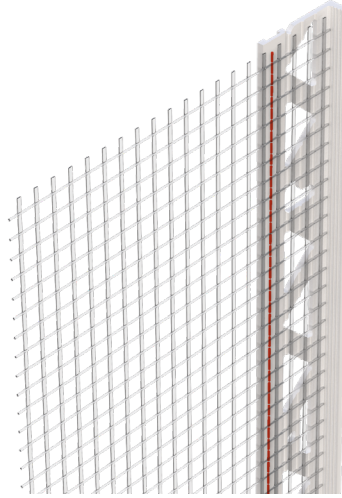

Applications

- for forming a clean plaster finish in ETICS systems
- PAP-003 for plaster thicknesses up to 3 mm
- PAP-006 for plaster thicknesses up to 6 mm
- PAP-008 for plaster thicknesses up to 8 mm
- PAP-010 for plaster thicknesses up to 10 mm
- PAP-014 for plaster thicknesses up to 14 mm

Properties

- Hard PVC profile
- alkali-resistant glass fibre fabric 160 g/m²

Substrate

Condition / Testing

- The substrate must be dry, load-bearing, clean, dust-free and free of adhesion-reducing residues, release agents, efflorescence and sintered coatings.

Processing

Temperature

- Do not use in case of air, material and substrate temperatures of less than +5°C or over +30°C.

Applying / Processing / Assembling

- Cut the profile to the required length using suitable support shears.
- Embed the end profile flush with the reinforcement over the entire surface and align.
- Bring the surface fabric up to the plaster edge and embed it in the reinforcement.
- Apply finish coat after a sufficient rest time.

Storage

- Store dry and flat.
- Deformation of the product due to improper storage must be avoided.

Packaging

- 25 pieces/bundle

Technical Data

Length

2.5 m

All data are average values that were determined under laboratory conditions according to relevant test standards and application tests. Deviations are possible under practical conditions.

PAP

Plaster end profile

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.