


akurit GE W12

PVC Mesh corner bead 12,5 × 12,5 mm

plastic profile, aligned and impact-resistant edge for thick-layer finishing plasters

- with smooth trigger edge
- ideal for scratch plasters
- for clean plaster corners

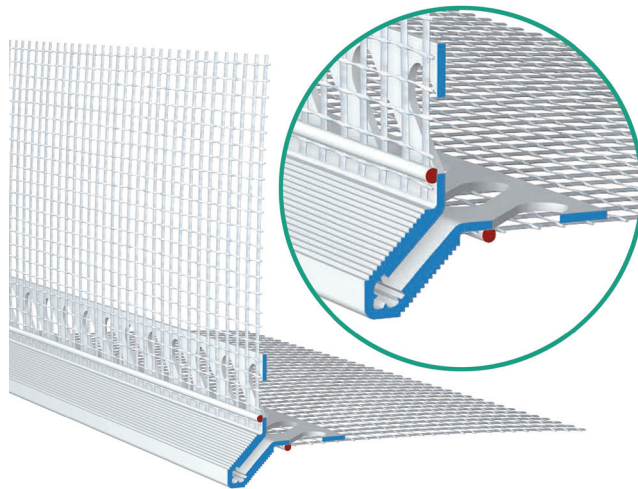

Applications

- in ETIC systems for thick-layer finishing renders
- for outer and reveal edges

Properties

- 2 punched plaster bars
- Pull-off edge ensures correct application thickness
- Plug connector enclosed

Substrate

Condition / Testing

- The substrate must be dry, load-bearing, clean, dust-free and free of adhesion-reducing residues, release agents, efflorescence and sintered coatings.

Temperature

- Do not use in case of air, material and substrate temperatures of less than +5°C or over +30°C.


Applying / Processing / Assembling

- Cut the mesh corner angle to the finished size using suitable support shears.
- Insert the mesh corner bracket vertically into the reinforcement compound without creases or bubbles. Remove excess reinforcement compound.
- When forming the surface reinforcement, guide the surface mesh up to the edge.
- Soffits can be reinforced in a single operation. To do this, guide the fabric leg up to the rear edge of the reveal and fill in the pre-applied reinforcement compound. When using plastering mouldings, the fabric legs of the plastering mouldings or the fabric corner bracket must overlap by at least 10 cm.

akurit GE W12

PVC Mesh corner bead 12,5 × 12,5 mm

3D graphic installation

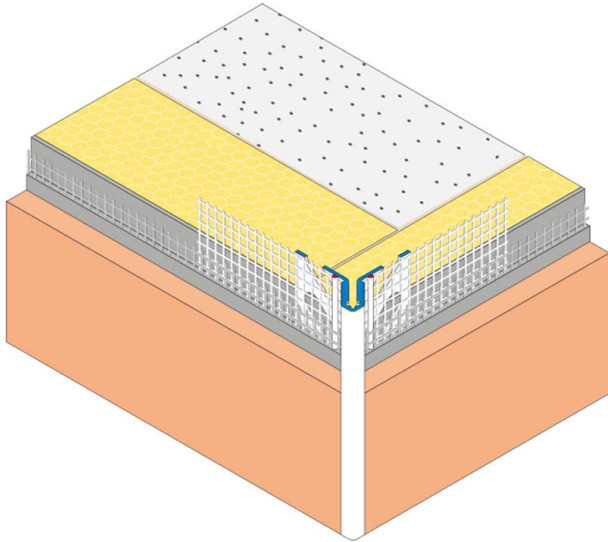

General notes

This information sheet provides only general recommendations. Should you have any queries relating to a specific application, please contact our technical sales advisor or call our hotline: +49 541 601-601. All of the details given are based on our current knowledge and experience and on the assumption that the materials are professionally applied and used for their normal purpose. All of the details are non-binding and do not release users from their duty to undertake their own tests to ensure suitability for the intended application. Due to the effects of different weather, processing and construction site conditions, no guarantee can be given for the general validity of all details. We reserve the right to make changes as a result of further development of the product and applications engineering. The general rules for construction engineering, the valid standards and guidelines, and the technical working guidelines must be observed. The publication of this technical data sheet renders all previous editions of this data sheet void. Please obtain the latest information from our website.

Storage

- Store dry and flat.
- Deformation of the product due to improper storage must be avoided.

Packaging

- 25 pcs/carton

Technical Data

Length 2.0 m

All data are average values that were determined under laboratory conditions according to relevant test standards and application tests. Deviations are possible under practical conditions.